


OIL PUMP COMPONENTS

EG1UK-01

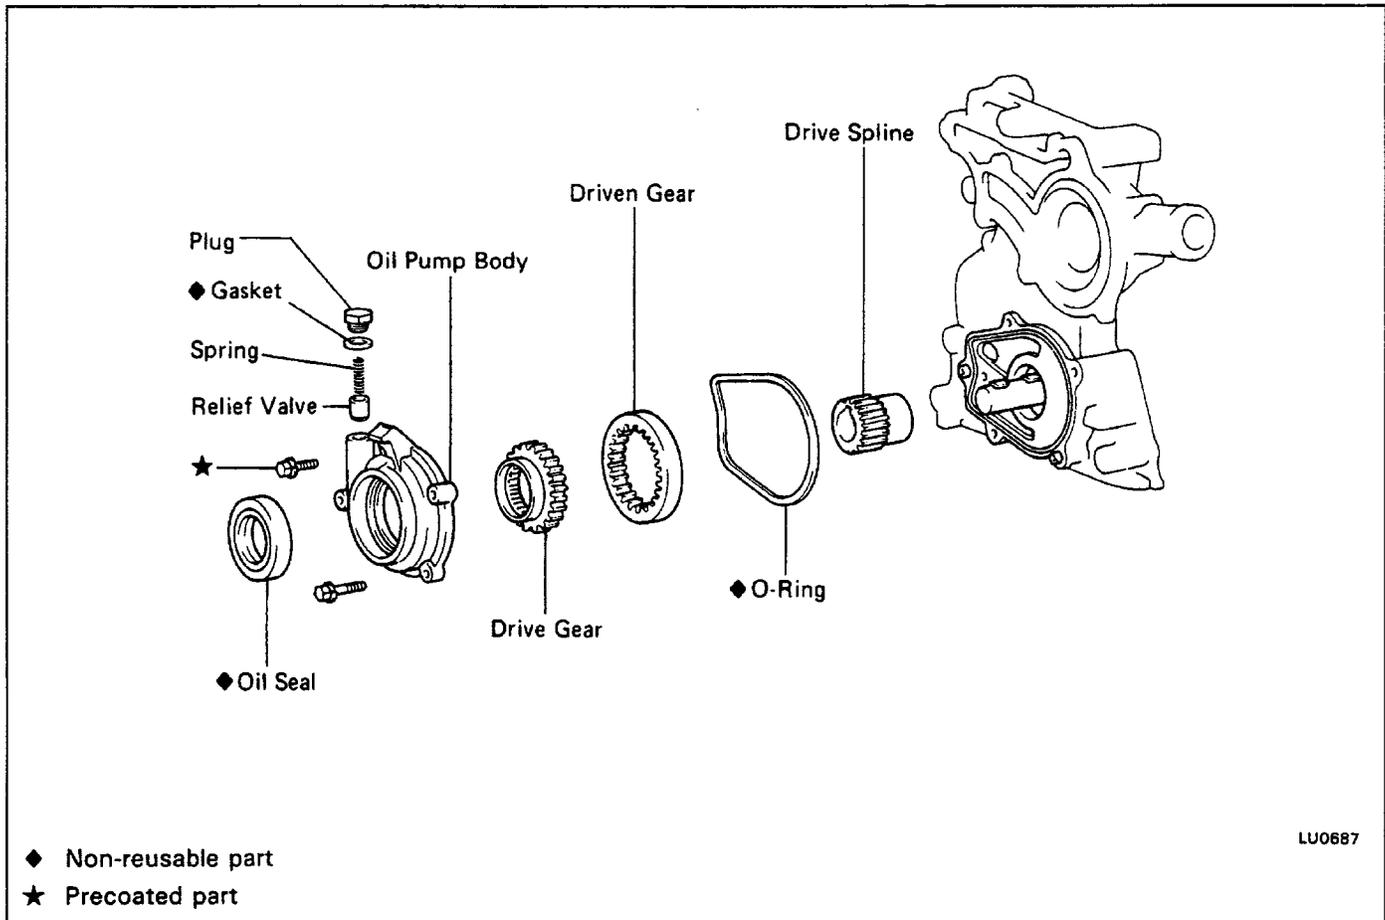

EG1UL-01

OIL PUMP REMOVAL

HINT: When repairing the oil pump, the oil pan and strainer should be removed and cleaned.

1. REMOVE OIL PAN

(See steps 3 and 4 on page [EG1-39](#))

2. REMOVE OIL STRAINER

Remove the four bolts holding the oil strainer.


3. REMOVE DRIVE BELTS

4. REMOVE CRANKSHAFT PULLEY

(See steps 4 on page [EG1-40](#))


5. (with A/C)

REMOVE A/C COMPRESSOR AND BRACKET

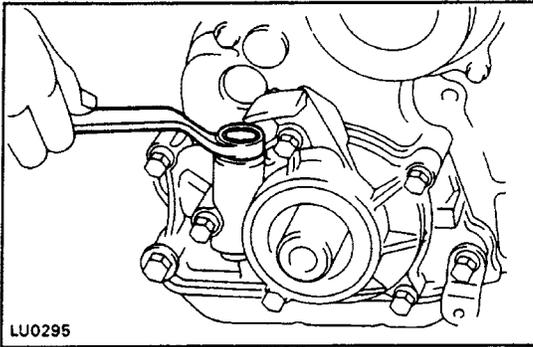


6. REMOVE OIL PUMP ASSEMBLY

(a) Loosen the oil pump relief valve plug.

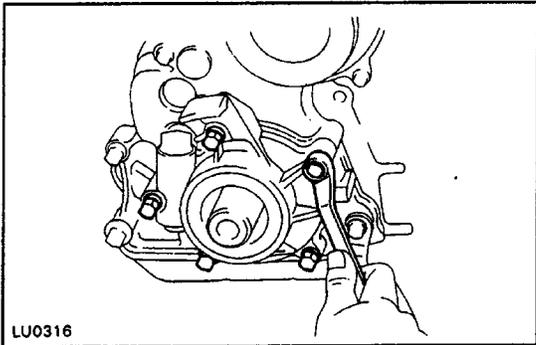

(b) Remove the five bolts, the oil pump assembly and O-ring.

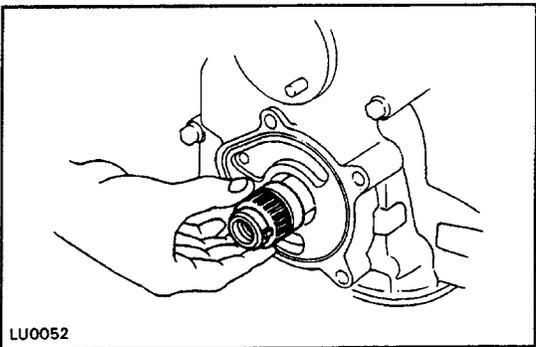


7. REMOVE OIL PUMP DRIVE SPLINE

HINT: If the oil pump drive spline cannot be removed by hand, use SST to remove the pump drive spline and crankshaft together.

(See page [EG1-42](#))

SST 09213-36020

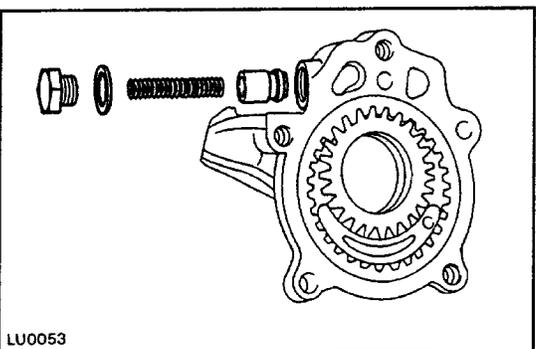


OIL PUMP DISASSEMBLY

1. REMOVE RELIEF VALVE

Unscrew the relief valve plug and gasket, and remove the spring and the relief valve.

2. REMOVE DRIVEN AND DRIVE GEARS

EG1UM-01

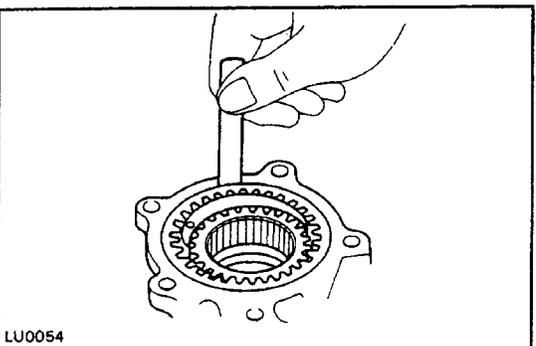

OIL PUMP INSPECTION

1. MEASURE BODY CLEARANCE

Using a thickness gauge, measure the clearance between the driven gear and body.


Standard clearance: 0.09–0.15 mm

(0.0035–0.0059 in.)

Maximum clearance: 0.2 mm (0.008 in.)

EG1UM-01

If the clearance is greater than maximum, replace the gear and/or body.

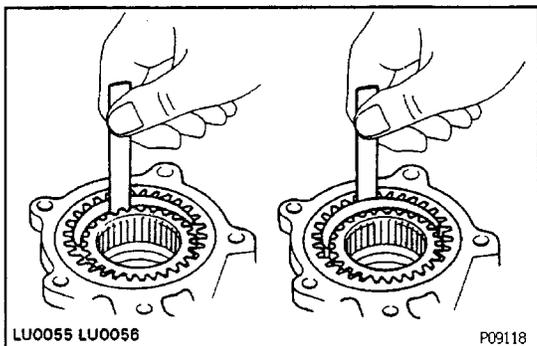

2. MEASURE TIP CLEARANCE

Using a thickness gauge, measure the clearance between both of the gear tips and crescent.


Standard clearance:

Driven 0.15–0.21 mm (0.0059–0.0083 in.)

Drive 0.22–0.25 mm (0.0087–0.0098 in.)

Maximum clearance: 0.3 mm (0.012 in.)

If the clearance is greater than maximum, replace the gears and/or body.

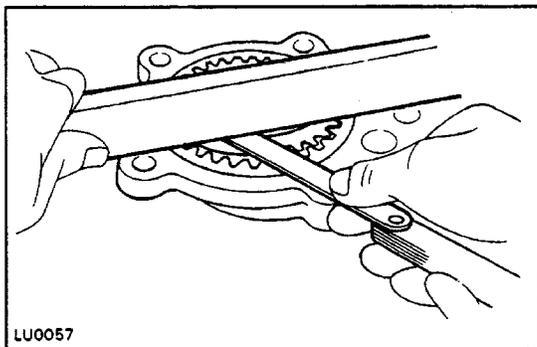

3. MEASURE SIDE CLEARANCE


Using a thickness gauge and flat block, measure the side clearance as shown.

Standard clearance: 0.03–0.09 mm

(0.0012 – 0.0035 in.)

Maximum clearance: 0.15 mm (0.006 in.)


If the clearance is greater than maximum, replace the gears and/or body.

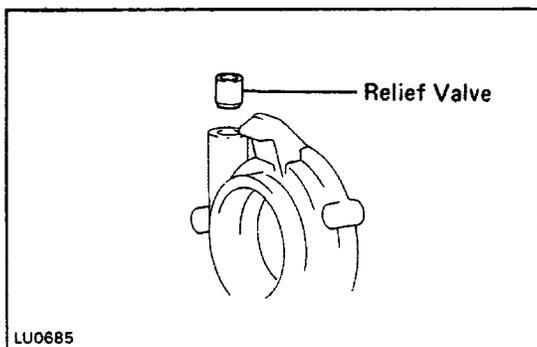

PRESSURE REGULATOR INSPECTION

Coat the valve piston with engine oil and check that it falls smoothly into the valve hole by its own weight.

If the valve does not fall smoothly, replace the valve and/or oil pump assembly.

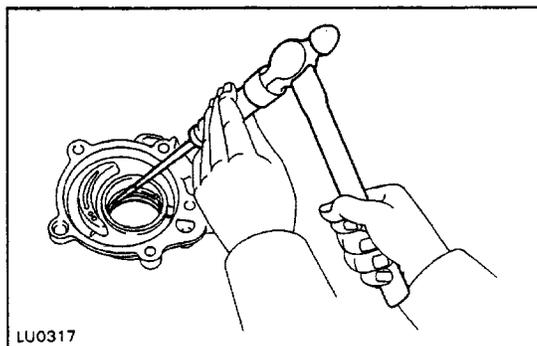

FRONT OIL SEAL REPLACEMENT


1. REMOVE OIL SEAL

(a) Remove the drive and driven gears.

(6) Using a screwdriver, remove the oil seal.


EG1UP-01

EG1UQ-01

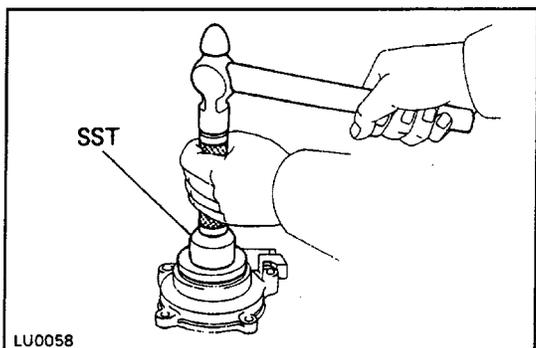

2. INSTALL OIL SEAL

- (a) Apply MP grease to a new oil seal lip.
 - (b) Using SST, drive in the new oil seal.
- SST 09223-50010

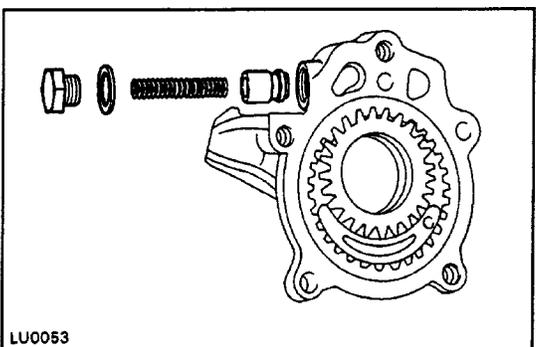


OIL PUMP ASSEMBLY.

(See page [EG1-238](#))

- (a) Install the relief valve and spring in the body, and screw on the relief valve plug with a new gasket.
- (b) Insert the drive and driven gears into the pump body.

EG1UR-01

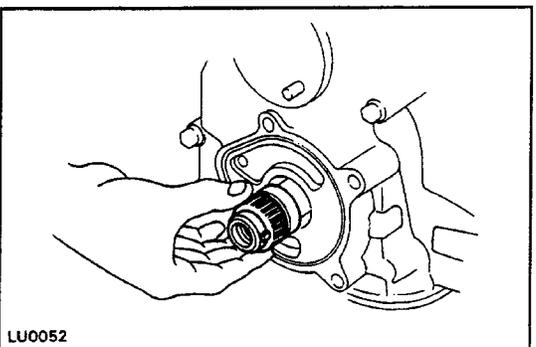

OIL PUMP INSTALLATION

(See page [EG1-238](#))

1. INSTALL OIL PUMP DRIVE SPLINE AND O-RING


- (a) Slide the pump drive spline onto the crankshaft.
- HINT: If the oil pump drive spline cannot be installed by hand, use SST. (See page [EG1-43](#))
- (b) Place the O-ring into the groove.

EG1UR-01

2. INSTALL OIL PUMP

- (a) Clean the threads of the upper set bolt and timing chain cover bolt hole of any sealer, oil or foreign particles.

Remove any oil with kerosene or gasoline.

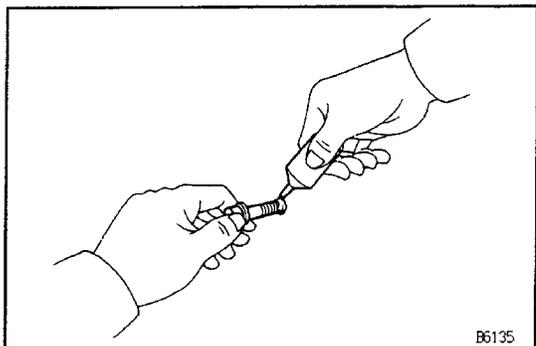


- (b) Apply sealant to 2 or 3 threads of the bolt end.

Sealant: Part No. 08833-00070, THREE BOND 1324 or equivalent

HINT: This adhesive will not harden while exposed to air. It will act as a sealant or binding agent only when applied to threads, etc. and air is cut off.

B6135

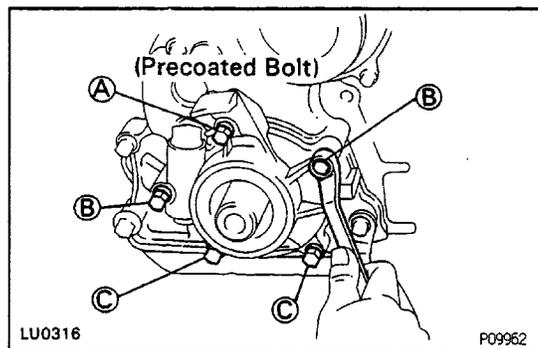

(c) Torque the five bolts.

Torque: (A) 25 N-m (250 kgf-cm, 18 ft-lbf)

(B) 19 N-m (195 kgf-cm, 14 ft-lbf)

(C) 13 N-m (130 kgf-cm, 9 ft-lbf)

(d) Torque the relief valve plug.

Torque: 37 N-m (375 kgf-cm, 27 ft-lbf)

3. INSTALL CRANKSHAFT PULLEY

(See step 8 on page [EG1-44](#))

4. INSTALL AND ADJUST DRIVE BELT

(See page [MA-6](#))

5. INSTALL OIL STRAINER

(See step 2 on page [EG1-70](#))

6. INSTALL OIL PAN

(See step 13 on page [EG1-44](#))