

PRECAUTIONS

1. Before working on the fuel system, disconnect the negative terminal from the battery.

HINT: Any diagnostic trouble code retained by the computer will be erased when the battery terminal is removed.

Therefore, if necessary, read the diagnosis before removing the battery terminal.

2. Do not smoke or work near an open flame when working on the fuel system.
3. Keep gasoline away from rubber or leather parts.

MAINTENANCE PRECAUTIONS

EG104-03



1. CHECK CORRECT ENGINE TUNE-UP

(See page [EG2-12](#))

2. PRECAUTIONS WHEN CONNECTING GAUGE

(a) Connect the tachometer positive terminal to the IG E terminal of the DLC1.

(b) Use the battery as the power source for the timing light, tachometer, etc.

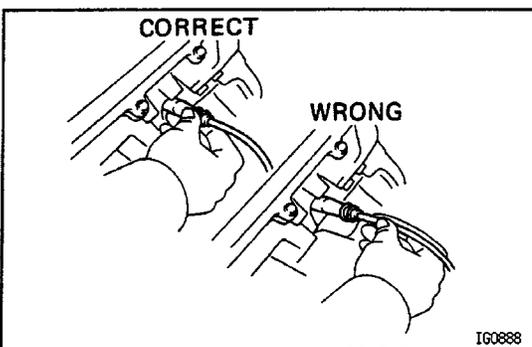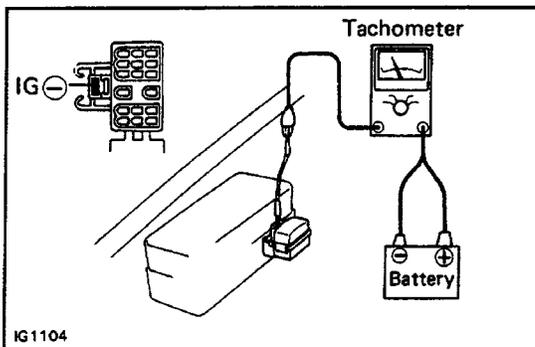

3. IN EVENT OF ENGINE MISFIRE, THE FOLLOWING PRECAUTIONS SHOULD BE TAKEN

(a) Check proper connection of battery terminals, etc.

(b) Handle high-tension cords carefully.


(c) After repair work, check that the ignition coil terminals and all other ignition system lines are reconnected securely.

(d) When clearing the engine compartment, be especially careful to protect the electrical system from water.

4. PRECAUTIONS WHEN HANDLING HEATED OXYGEN SENSOR

(a) Do not allow the heated oxygen sensor to drop or hit against an object.

(b) Do not allow the sensor come into contact with water.

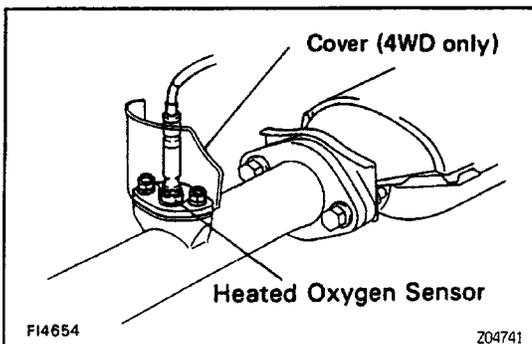



IF VEHICLE IS EQUIPPED WITH MOBILE RADIO SYSTEM (HAM, CB, ETC)

The ECM has been designed so that it will not be affected by outside interference.

However, if your vehicle is equipped with a amateur radio transceiver, etc. (even one with approx. 10 W output), it may, at times, have an effect upon ECM operation, especially if the antenna and feeder are installed nearby.

Therefore, observe the following precautions:


- (a) Install the antenna as far away as possible from the ECM. The ECM is located in the right side kick panel so the antenna should be installed at the rear, left side of the vehicle.
If installing on the bumper, do so on the right side, if possible.
- (b) Keep the antenna feeder as far away as possible from the ECM wires – at least 20 cm (7.87 in.) – and, especially, do not wind them together.
- (c) Check that the feeder and antenna are properly adjusted.
- (d) Do not equip your vehicle with a powerful mobile radio system.
- (e) Do not open the cover or the case of the ECM unless absolutely necessary. (If the IC terminals are touched, the IC may be destroyed by static electricity.)

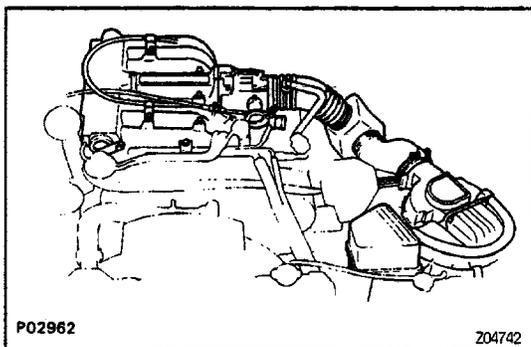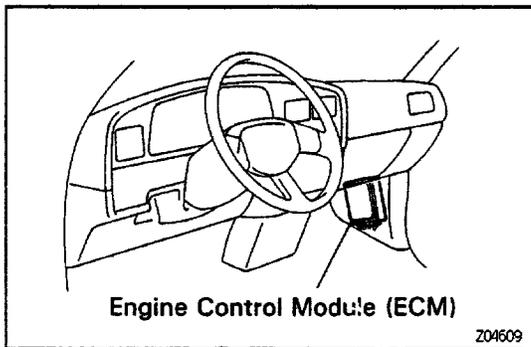

AIR INDUCTION SYSTEM

EG108-03

1. Separation of the engine oil dipstick, oil filler cap, PCV hose, etc. may cause the engine to run out of tune.
2. Disconnection, looseness or cracks in the parts of the air induction system between the volume air flow meter and cylinder head will cause air suction and cause bad engine tuning.

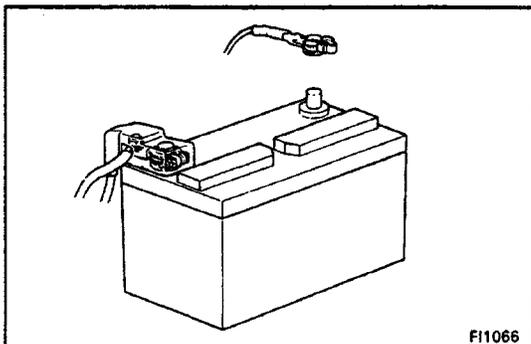


ELECTRONIC CONTROL SYSTEM

EG107-03


1. Before removing MFI wiring connectors, terminals, etc., first disconnect the power by either turning the ignition switch OFF or disconnecting the battery terminals.
2. When installing a battery, be especially careful not to incorrectly connect the positive and negative cables.

3. Do not permit parts to receive a severe impact during removal or installation. Handle all MFI parts carefully, especially the ECM.
4. Take great care during troubleshooting as there are numerous transistor circuits and even slight terminal contact can cause further troubles.
5. Do not open the ECM cover.
6. When inspecting during rainy weather, take care to prevent entry of water. Also, when washing the engine compartment, prevent water from getting on the MFI parts and wiring connectors.
7. Parts should be replaced as an assembly.

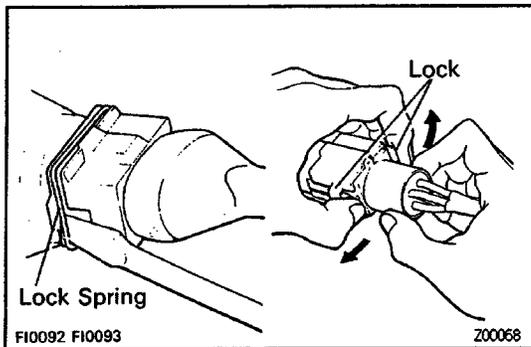


8. Care is required when pulling out the inserting wiring connectors.


(a) To pull the connector out, release the lock and pull on the connector.

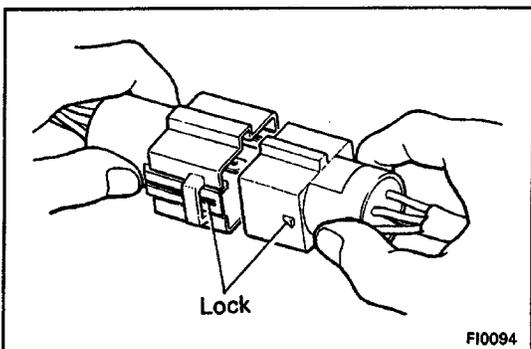

(b) Fully insert the connector and check that it is locked:

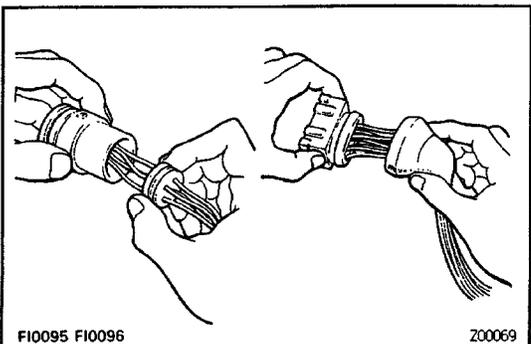


9. When inspecting a connector with a volt/ohmmeter.
 - (a) Carefully take out the water-proofing rubber if it is a water-proof type connector.

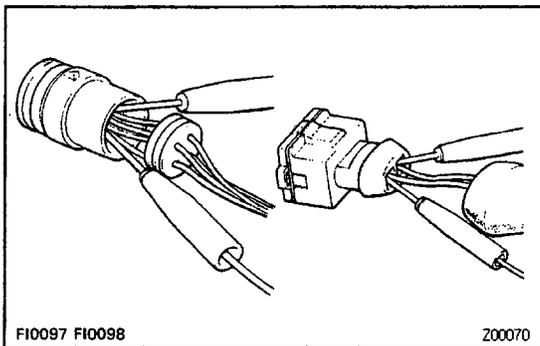

(b) Insert the tester probe into the connector from the wiring side when checking the continuity, amperage or voltage.

(c) Do not apply unnecessary force to the terminal.


(d) After the check, securely install the water-proofing rubber on the connector.

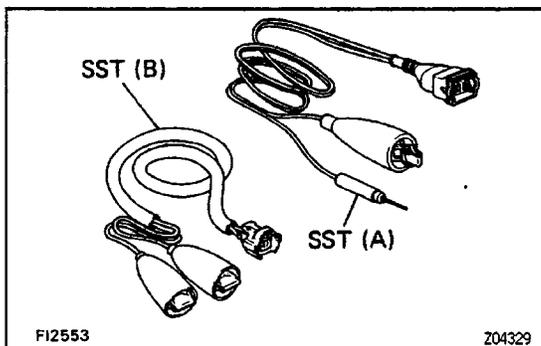

10. Use SST for inspection or testing of the injector, cold start injector or their wiring connectors.

SST 09842-30050 (A)

09842-30070 (B)

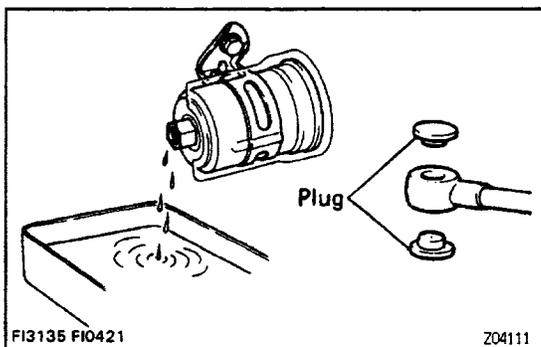

FUEL SYSTEM

EG17A-02

1. When disconnecting the connection of the high fuel pressure line, a large amount of gasoline may come out so observe the following procedure:

(a) Put a container under the connection.

(b) Slowly loosen the connection.

(c) Disconnect the connection.

(d) Plug the connection with a rubber plug.

2. When connecting the flare nut or union bolt on the high pressure pipe union, observe the following procedure:



(Union bolt type)

(a) Always use a new gasket.

(b) Tighten the union bolt by hand.

(c) Tighten the union bolt to the specified torque.

Torque: 15 N-m(150 kgf-cm, 11 ft-lbf)

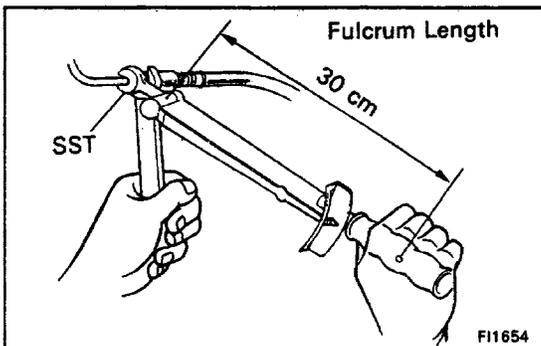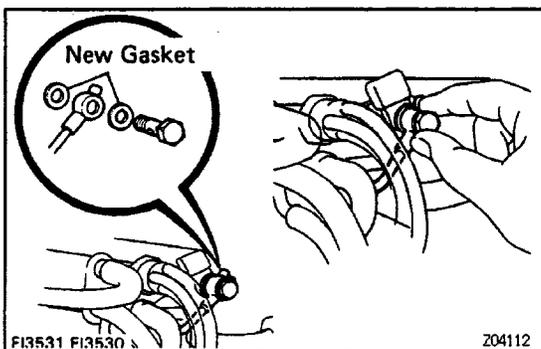

(Flare nut type)


(a) Apply a light coat of engine oil to the flare and tighten the flare nut by hand.

(b) Then using SST, tighten the flare nut to the specified torque.


SST 09631- 22020

Torque: 27 N-m (280 kgf-cm, 20 ft-lbf)


HINT: Use a torque wrench with a fulcrum length of 30 cm (11.81 in.)

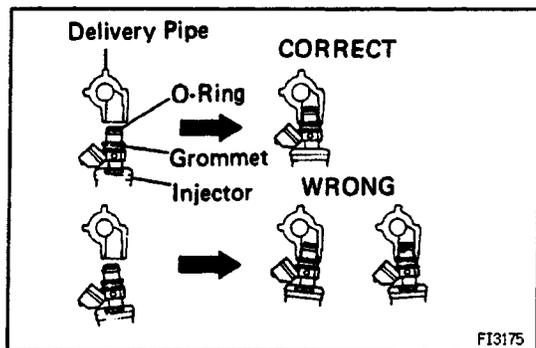


3. Observe the following precautions when removing and installing the injectors.
 - (a) Never reuse the O-ring.
 - (b) When placing a new O-ring on the injector, take care not to damage it in any way.
 - (c) Lubricate the new O-ring with spindle oil or gasoline before installing – never use engine, gear or brake oil.

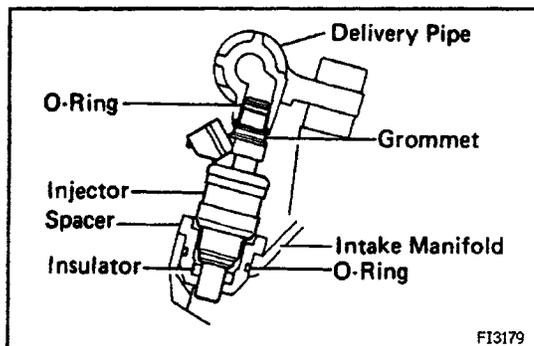

4. Install the injector to the delivery pipe and intake manifold as shown in the illustration.

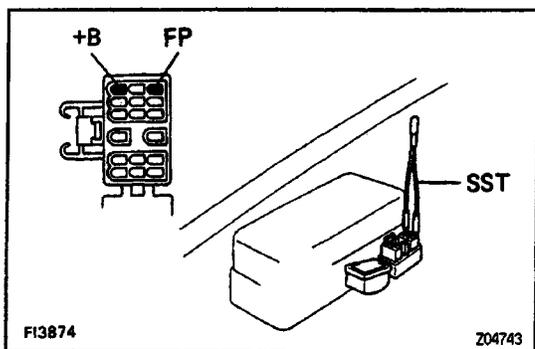

5. Confirm that there are no fuel leaks after performing any maintenance on the fuel system
 - (a) With engine stopped, turn the ignition switch ON.
 - (b) Using SST, connect terminals FP and +B of the DLC 1.
- SST 09843-18020

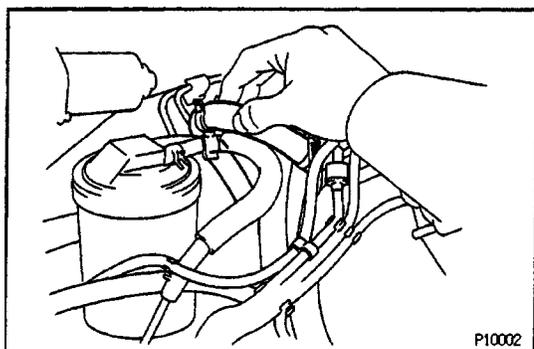

- (c) When the fuel return hose is pinched, the pressure within the high pressure line will rise to approx. 392 kPa (4 kgf/cm², 57 psi). In this state, check to see that there are no leaks from any part of the fuel system.

NOTICE: Always pinch the hose. Avoid bending the hose as it may cause the hose to crack.

- (d) Turn the ignition switch OFF.
- (e) Remove SST
SST 09843-18020